


Brighter and Cooler

High Efficacy & Lower Thermal Resistance




Luna 200 Chip on Board is a high-performance LED module based on patented **DBR Flip Chips** and unique low temperature bonding technology. The magnitude of the LED illumination is enhanced by the DBR structure to further increase the lighting efficacy. Additionally, the embedment between LED flip chips and MCPCB as well lowers the thermal resistance.



Features:

- Patented DBR Flip Chips
- 442.3W Maximum Power
- Available in 2700K, 3000K, 3200K, 4000K, 5000K, 5600K CCT
- Available in 70-, 80-, 90-, 95- CRI Options
- 32mm Light Emitting Surface
- 0.12°C/W Thermal Resistance
- 35x35mil Flip Chips
- Low Temperature Bonding
- RoHS Compliant

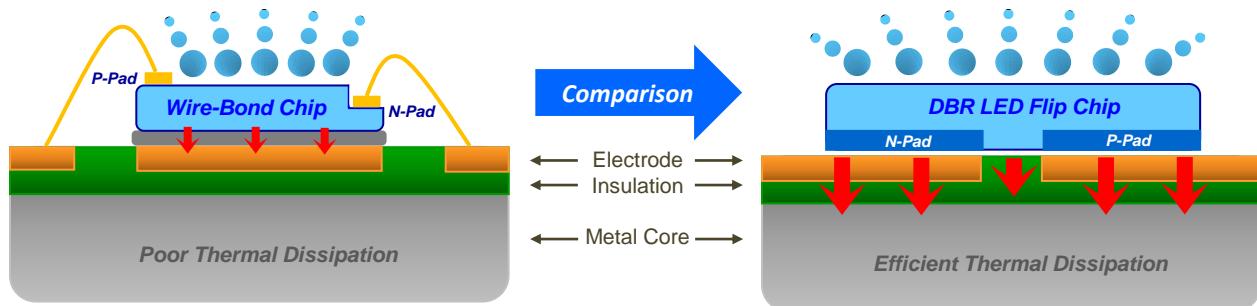

Absolute Maximum Ratings (Ta=25°C):

Parameter	Symbol	Max. Rating	Conditions
Power Dissipation	P _d	442.3W	T _j ≤140°C
DC Forward Current	I _F	9,100mA	T _j ≤140°C
Junction Temperature	T _j	140°C	
Reverse Voltage	V _r	-5V	T _{ambient} = 25°C
Reverse Current	I _r	≤1μA	V _r = -5V
Operating Case Temperature	T _c	-40°C to 105°C	
Storage Temperature	T _{ST}	-40°C to 120°C	
Soldering Conditions		280°C < 3.5 secs	

*under absolute maximum rated operations - T_c is required to be maintained below 85C in order to achieve minimal degradation in lifespan and performance

Electro-Optical Characteristics (Ta=25°C):

Viewing Angle 2θ_{1/2} = 140°


Nominal CCT	Luna Part Number	CRI (min)	Luminous Flux (lm) @ I _F =4.55A	V _F (V) @ I _F =4.55A	Luminous Flux (lm) @ I _F =9.1A	LES (mm)
5000K	200-5070	70	27,970	45.7	44,925	32
5000K	200-5080	80	27,125	45.7	43,560	
4000K	200-4070	70	27,140	45.7	43,580	
3000K	200-3080	80	24,615	45.7	39,540	

Thermal Characteristics:


Parameter	Symbol	°C/W	Definition
Thermal Resistance	R _{th(j-b)}	0.12	Between LED Junction and COB Bottom Surface



- Junction Temperature T_j = T_b + Power(W) x R_{th(j-b)}, where T_b is the temperature at COB bottom surface.

Bins on the ANSI C78 :

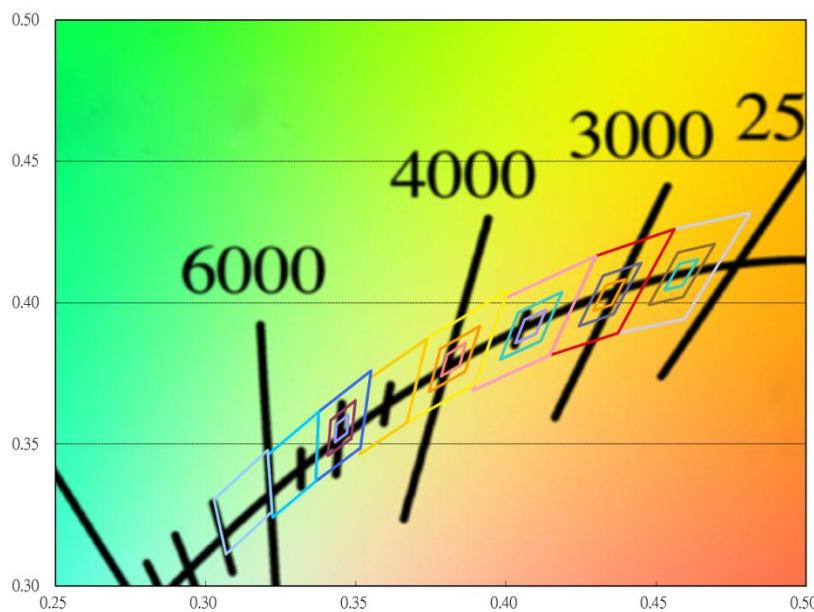


Nominal CCT	x	y
3000K	0.4562	0.4260
	0.4299	0.4165
	0.4147	0.3814
	0.4373	0.3893
	0.4562	0.4260
4000K	0.4006	0.4044
	0.3736	0.3874
	0.3670	0.3578
	0.3898	0.3716
	0.4006	0.4044
5000K	0.3551	0.3760
	0.3376	0.3616
	0.3366	0.3369
	0.3515	0.3487
	0.3551	0.376

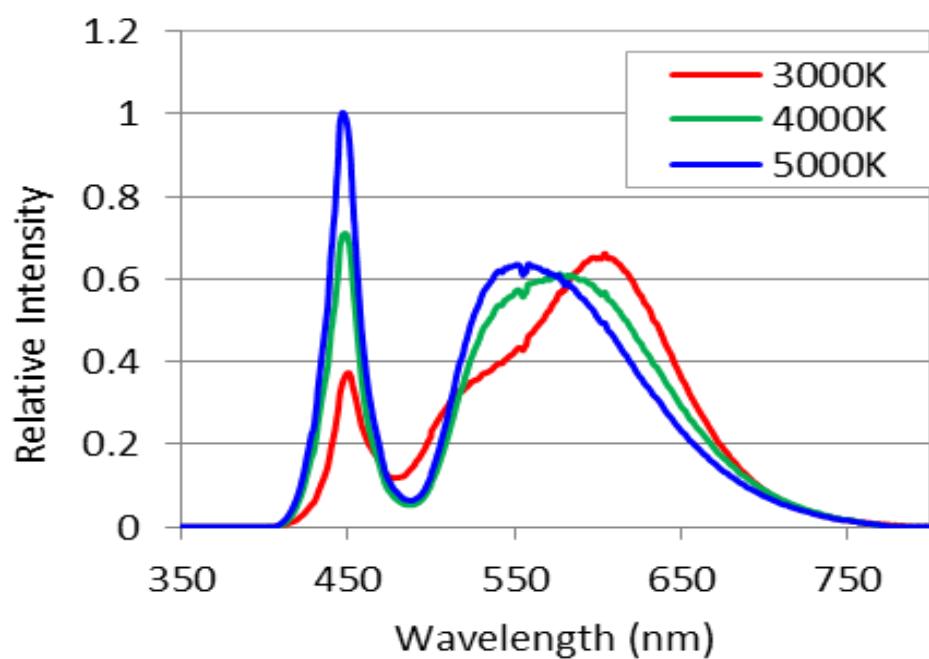
Spectrum ($T_a=25^{\circ}\text{C}$):

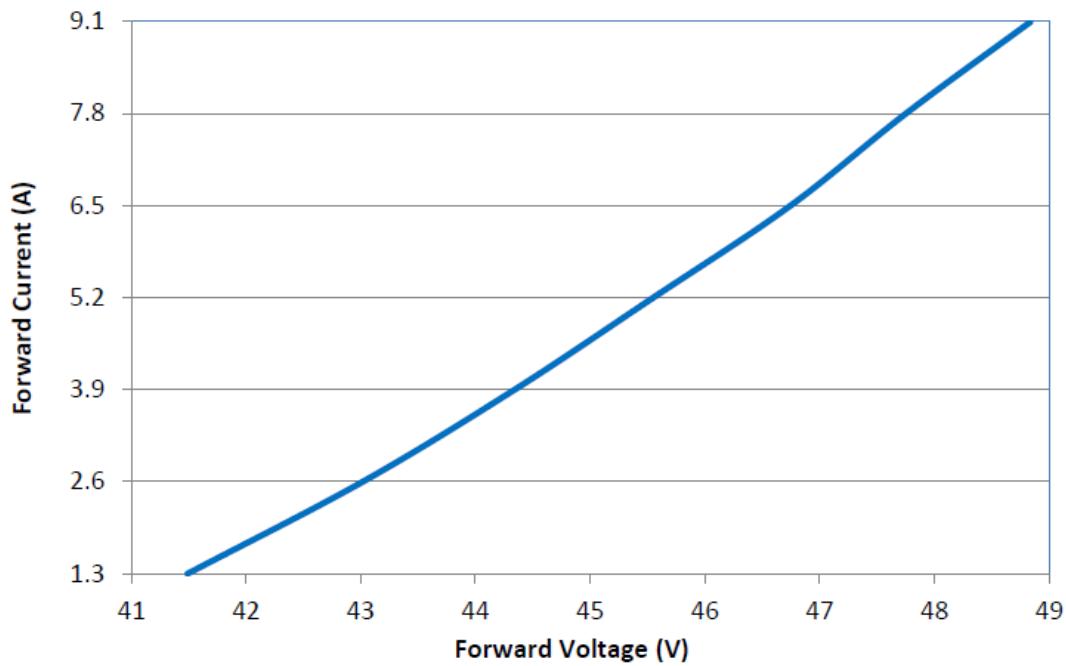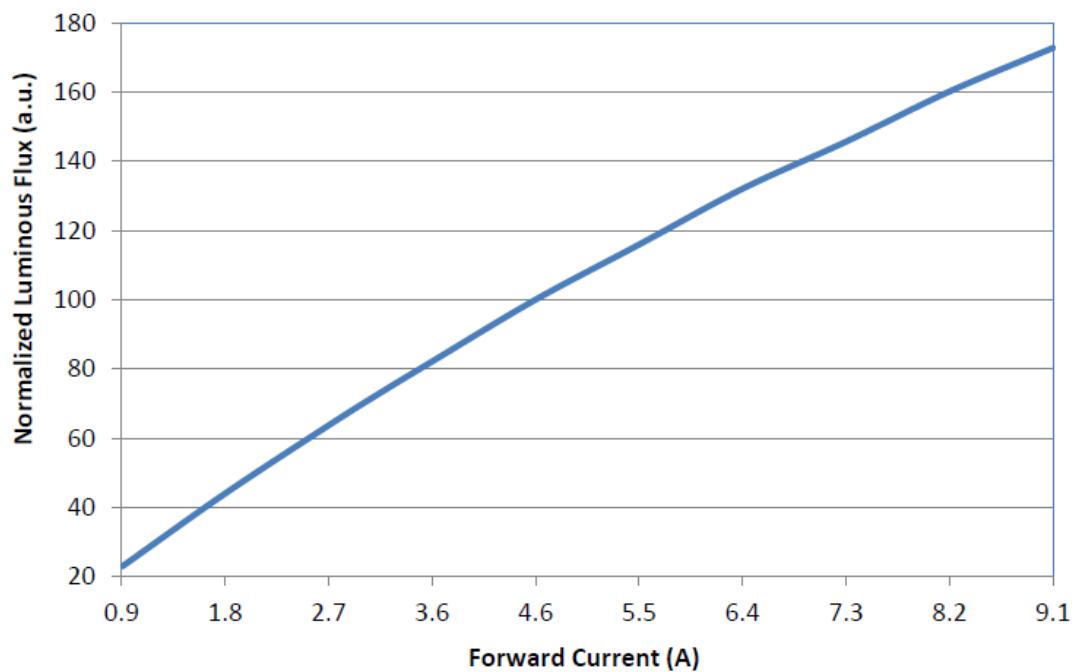Characteristic Graphs (Ta=25°C):(i) Typical Forward Current (I_F) vs. Forward Voltage (V_F)(ii) Typical Normalized Luminous Flux vs. Forward Current (I_F)

(iii) Typical Spatial Radiation Pattern

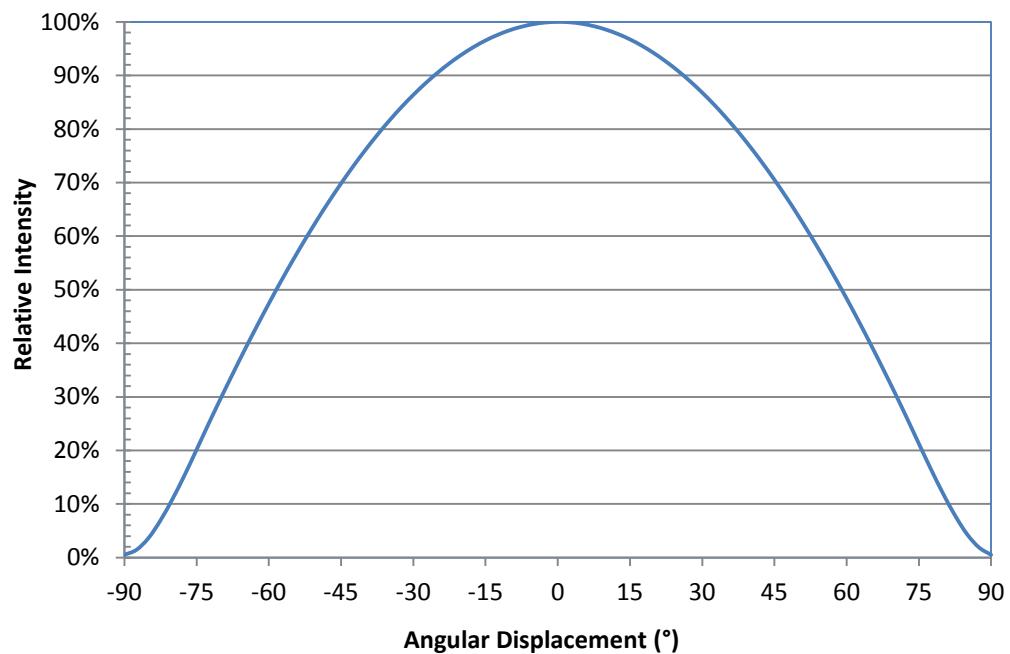


(iv) Typical Polar Radiation Pattern

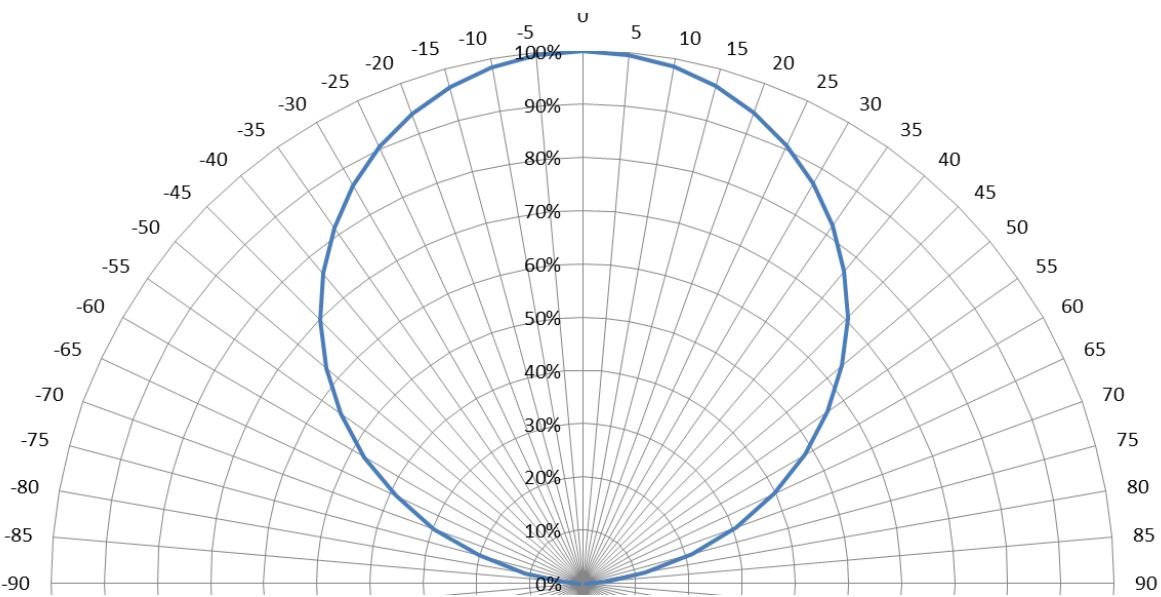


Mechanical Dimensions:

- Solder pads are labeled “+” and “-“ to denote positive and negative, respectively.
- Drawing dimensions are in millimeters, and are not to scale.
- Tolerance: $\pm 0.2\text{mm}$
- The optical center of the LED Array is defined by the mechanical center of the array.
- M3 screws are recommended for mounting

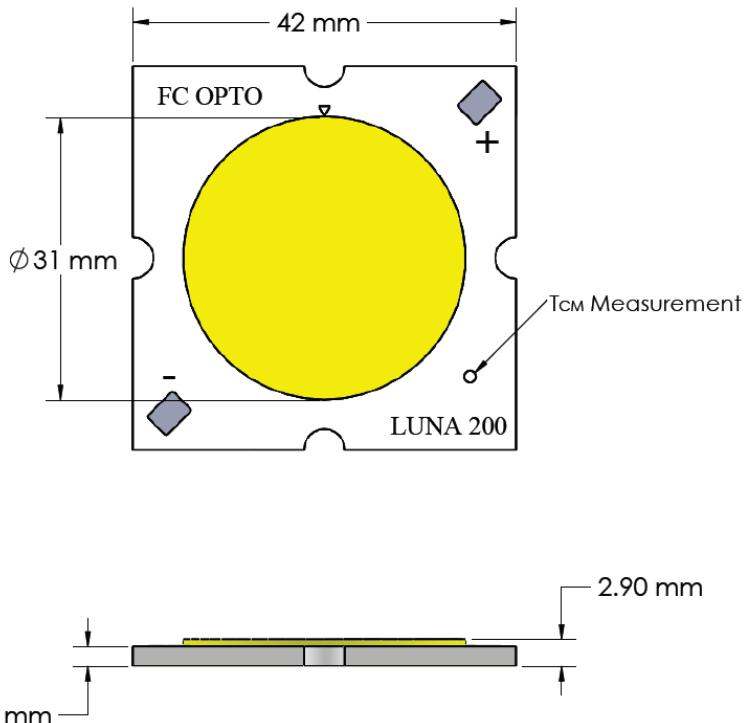

Circuit Diagram:

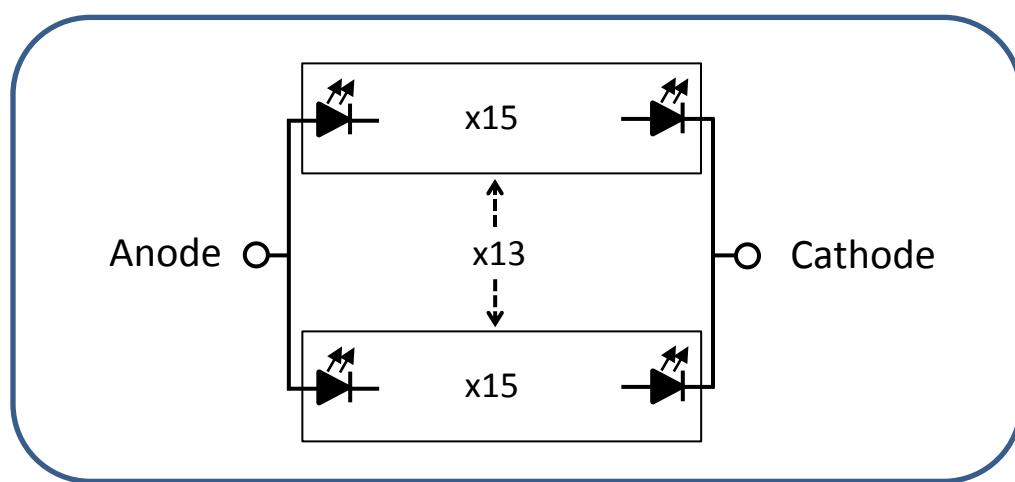

Cautions:

1. Circuit Protection is recommended during the assembly and operation.
 - i. MOV, TVS, current fuse, thermal fuse, capacitor, resistor are options to avoid unexpected circuit faults.
2. Storage Conditions
 - i. Moisture Controlled environment is recommended to avoid COB damages during storage. Moisture may cause circuit damages and result in brightness reduction or failure in circuit contacts.
 - ii. COB in moisture-proof sealed bags should be stored in ambient conditions of temperature less than 30°C and humidity less than 90%RH.
 - iii. COB in open air should be kept in ambient conditions of temperature less than 30°C and humidity less than 60%RH.
 - iv. COB should be restored in moisture-proof bag with moisture absorbent together.
3. Handling Light Emitting Surface (LES)
 - i. LES is a silicone lens and should not have direct contact with sharp tools and human fingers.
4. Recommendation on Assembly with Heat Sink
 - i. Apply thermal grease over the heatsink contact surface to seal the voids and roughness pre-existing on the contact surface.
 - ii. Attach COB onto heatsink contact surface with thermal grease in between. Thermal grease thickness is suggested less than 25um (1 mil)
 - iii. Apply sufficient pressure to secure the COB, and ensure (a) full contact between COB and heatsink, (b) no voids within thermal grease, (c) minimal thermal grease thickness.
5. Flip Chip Opto is not responsible to the damages caused by the operation under the parameters exceeding the values described in the specification.